



How To

Service Documents from APPI


Document: #HT000120

Document Title: Replace High-Voltage Board

Product(s): T-375

Procedure:

Turn Main Power OFF, disconnect power, and remove Left-Side Panel.

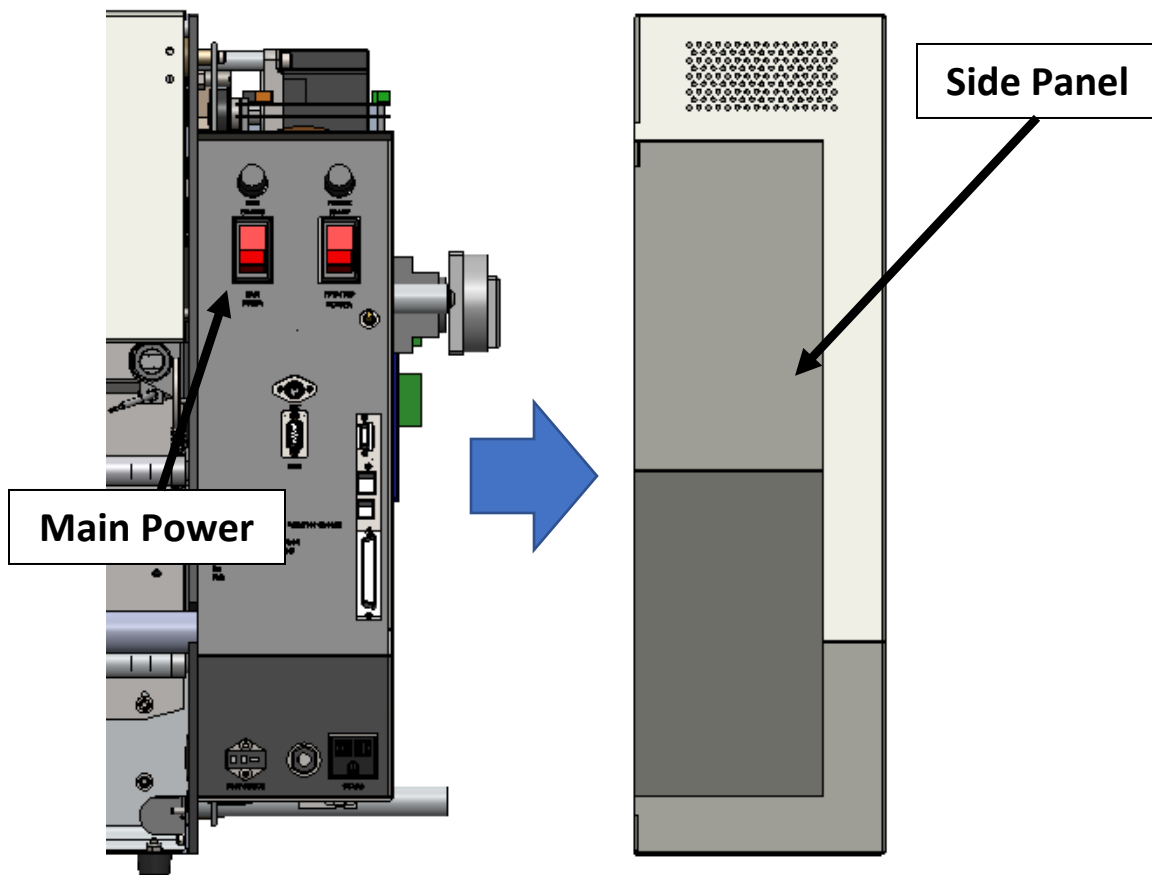




How To


Service Documents from APPI

Unplug all four cables from **High-Voltage Board** (J1 through J4):

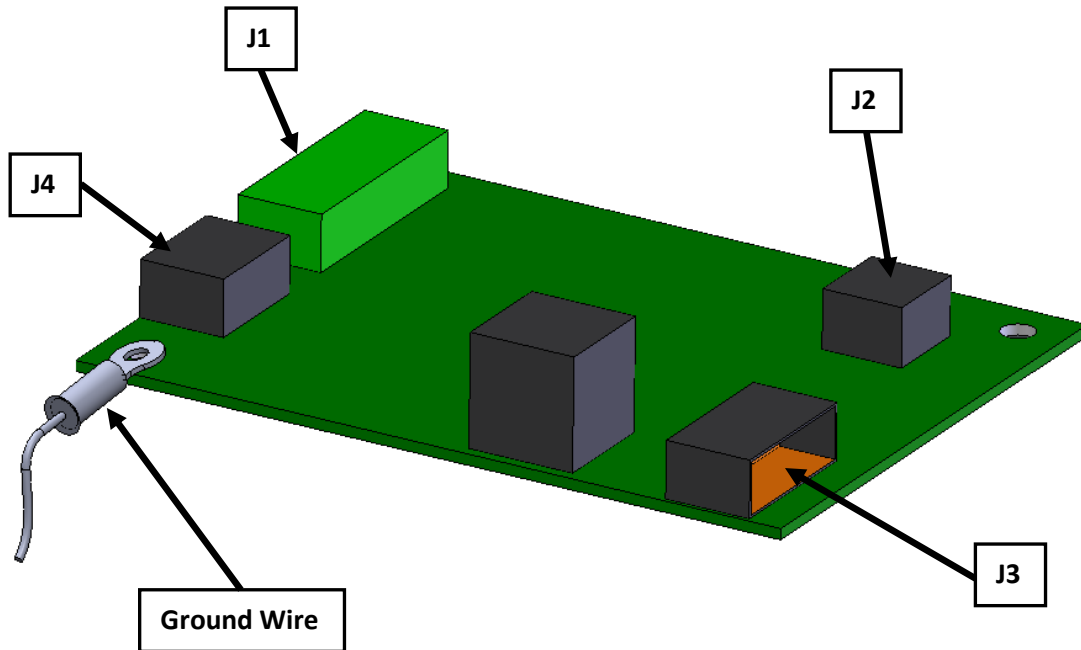

Remove Hex Nuts attaching **High-Voltage Board** to **Transformer Assembly**, along with **Ground Wire**.

(Top View)

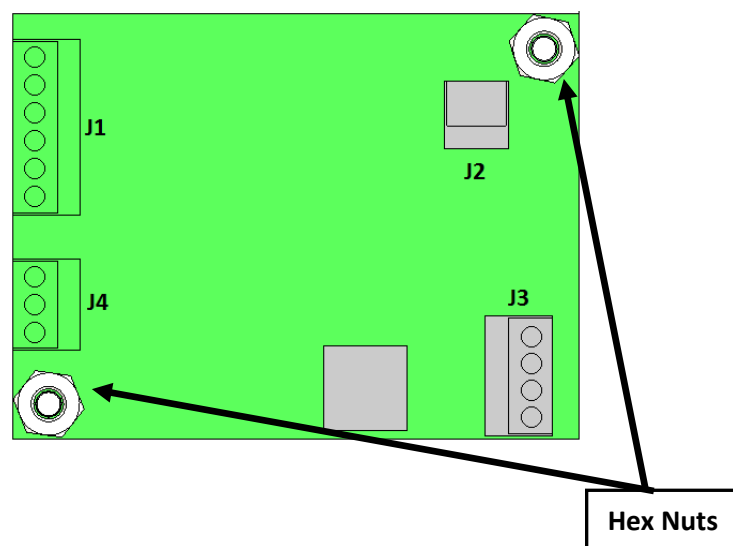




How To

Service Documents from APPI

Lift High-Voltage Board away from Transformer Assembly.

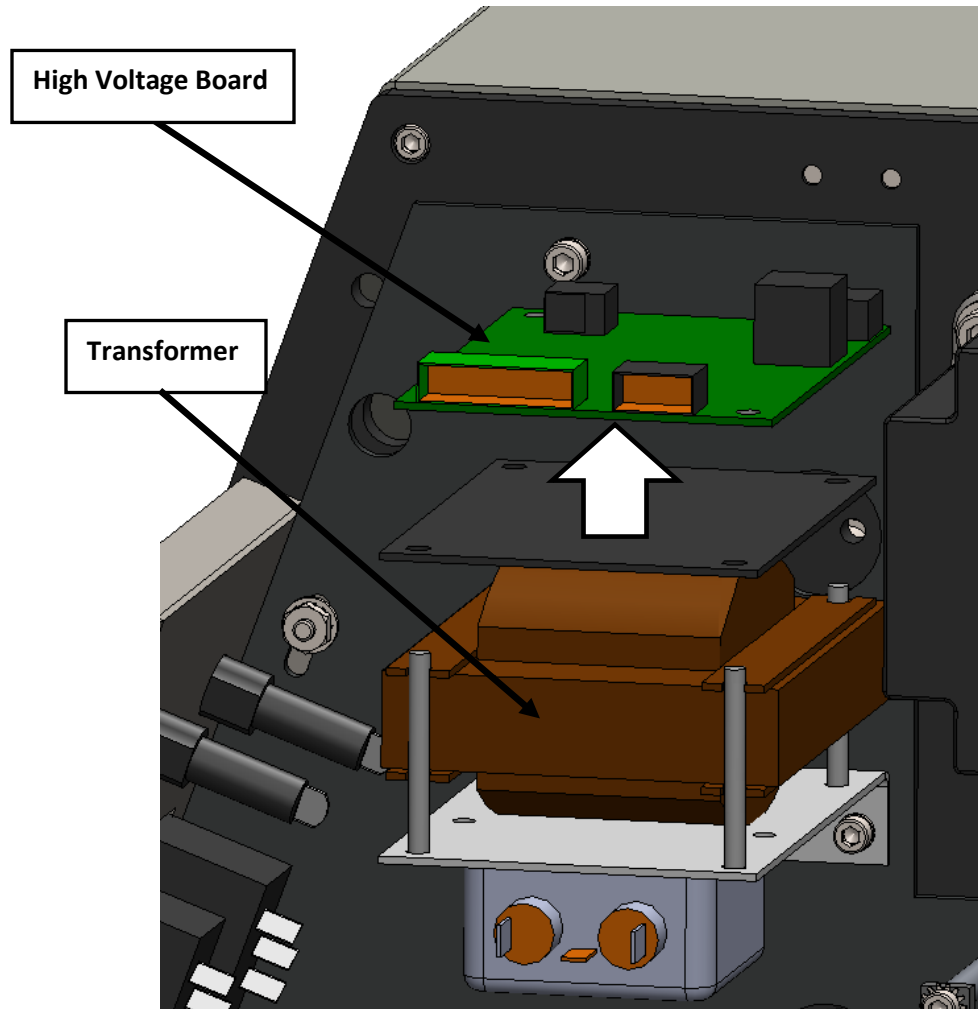

Install replacement High-Voltage Board (TP- T1ME00301).

Replace and tighten Hex Nuts.

Plug in cables, replace Side Cover.



How To

Service Documents from APPI

Note: It may be necessary to adjust the sensitivity of the new board. The Green and Red LEDs should flash one after the other when it senses perf. If not, using a small screw driver, turn the adjustment on the potentiometer counter-clockwise to increase the sensitivity of the High Voltage Board.

