

Ultra Feed Series Conveyors

UF-2000 Incline Conveyor


The UF-2000 Incline Conveyor transports loose or packaged product to table height, to check-weigh scales or to other downstream equipment.

Special Features:

- Oversized product “catch” chute.
- Adjustable height and tilt.
- Adjustable discharge chute.
- Lightweight, extruded aluminum frame.
- 3/4” permanently lubricated bearings.
- Fixed speeds or variable speeds.

Specifications/ Worksheet UF-2000

- A. Length _____
B. Exposed belt width _____
C. Cleat width _____
D. Cleat height _____
E. Cleat spacing _____

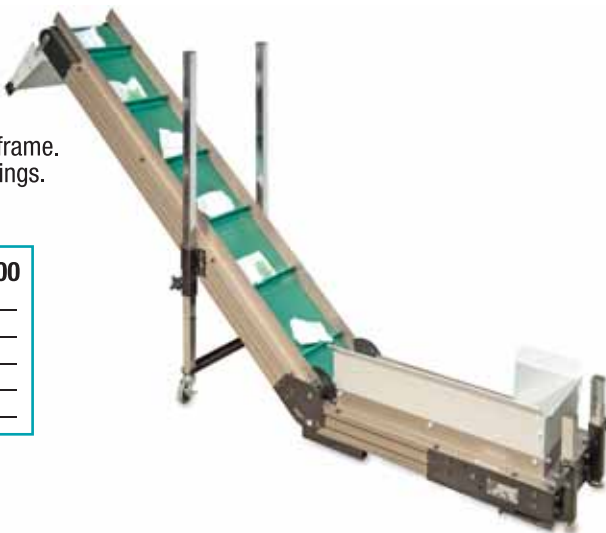

UF-3020 Vibratory Hopper/Conveyor Light Duty

The UF-3020 hopper is built onto a cleated conveyor and it is typically used for lighter parts, such as molded plastic parts. This machine is often customized to fit your application, so there is flexibility:

- Hopper size
- Conveyor width
- Conveyor length
- Cleat spacing
- Cleat height

Parts should be clean without chemicals or coatings that could damage a belt or other conveyor surfaces.

Specifications/ Worksheet UF-3020

- A. Length _____
B. Exposed belt width _____
C. Cleat width _____
D. Cleat height _____
E. Cleat spacing _____
F. Discharge height _____
G. Hopper size _____ (Cubic Ft.)
H. Cubic foot _____

