



How To

Service Documents from APPI


Document: #HT000005

Document Title: Clear RAM

Product(s): Ti-1000 TEC Printer

Procedure:

With power "OFF", hold down "FEED" and "PAUSE" buttons on the control panel.

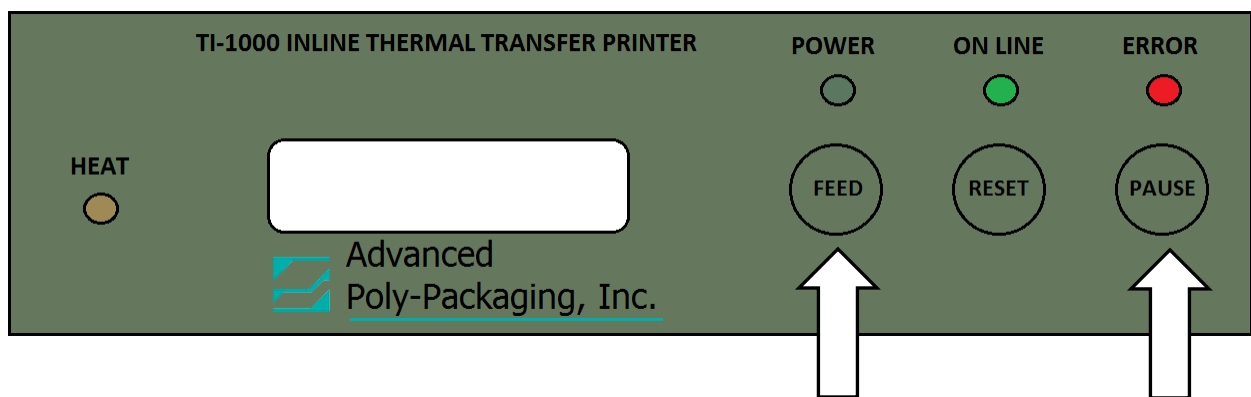

While holding buttons, turn Power "ON".

Press "FEED" button 4 times.

Press "PAUSE" button 1 time.

Press "FEED" button 2 times.

Press "PAUSE" button 1 time.

Screen should display "COMPLETE".

Turn Power "OFF", wait 1 minute, turn Power back "ON".