

## Document: #HT000154

**Document Title: Print Labels on Crosstex T-1000** 

Product(s): T-1000

**Procedure:** 

When the Bagger starts up, you will see this startup screen.

You can wait for the screen to change, or press "**Operation**".



Press "STOP" to change "START" mode.


Press "Printer Settings".

MAIT STOP	MANL				
TIZ-INL OPERATION				0	
	Power OFF	Clear			
OFF	No Label	Labels Ribbon Rewind		Dual Print	
	Reprint Buffer	Fault (Off)		Operation	
Label Qty 12345	Nip Open	RESET	2	Job Search	
Preset Count Remaining 12345 Of 12345				Production Mode	
Total Count Remaining 123456 Of 123456			Printer	Main	
Production Time hhh:mm:ss RESET Se			Settings	Menu	

## How To Service Documents from APPI

If this box says Reprint "**ON**", or "Overwrite", press it until it says Reprint "**OFF**".

Press "Stored Labels".

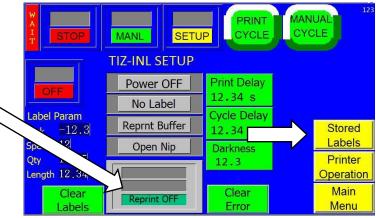

Press "**Label #**." On the keypad that pops up:

Press "**1**", then **ENT** for shift number 1.

Press "**3**", then **ENT** for shift number 3.

Press "Printer Operation" to return to the Operation screen.

